

Dimming and Scene

Wise Scene/Switch Receiver

240V 800W



The **Wise Scene Switch Receiver** is an 800W 240V switch that is controlled by wireless switches or by a push-to-make switch.

Please Note:

The current iteration of this product has a 3 second on/off delay in scene (Option A) and switching (Option B) programming modes. Switching ON (Option C) and switching OFF (Option D) only programming does not have a 3 second delay, but please note that these options cannot be programmed on the same button.

It can be programmed in 4 different ways using our wireless switches:

Option A - Scene Programming

Programming a 7 button switch gives you 4 scenes, master raise/lower and off. A scene is a preset level of light for each circuit in a room. For example, you can have 4 receivers in your living room. Pressing scene 1 on the 7 button switch could give the following;

Downlights = 100%

Wall lights = 80%

Pendant = Off

Low level LEDs = 55%

Pressing scenes 2,3 and 4 can give other preset levels. Any level can be programmed to each receiver.

Option B - Switching Programming

Programming a 1 button switch gives you on/off.

Option C - Switching ON only

Programming a 1 button switch gives you only ON. This function is used to program multiple circuits to ON.

Option D - Switching OFF only

Programming a 1 button switch gives you only OFF. This function is used to program multiple circuits to OFF.

A receiver is not limited to one of the programming options. E.g. you can program a switch for scene control, another switch for dimming and another switch for master ON/OFF.


Wireless Switches and Remotes

A 7 button switch must be used if you require scene setting, Option A. Any button switch can be used when programming options B,C and D. To view other switches click the links on the right of this page, for example Wireless ID switches.

A wired push-to-make switch will work as a dimmer, Option B.

A Wise Scene Receiver is required for every circuit.

Wise Controls Introduction Video

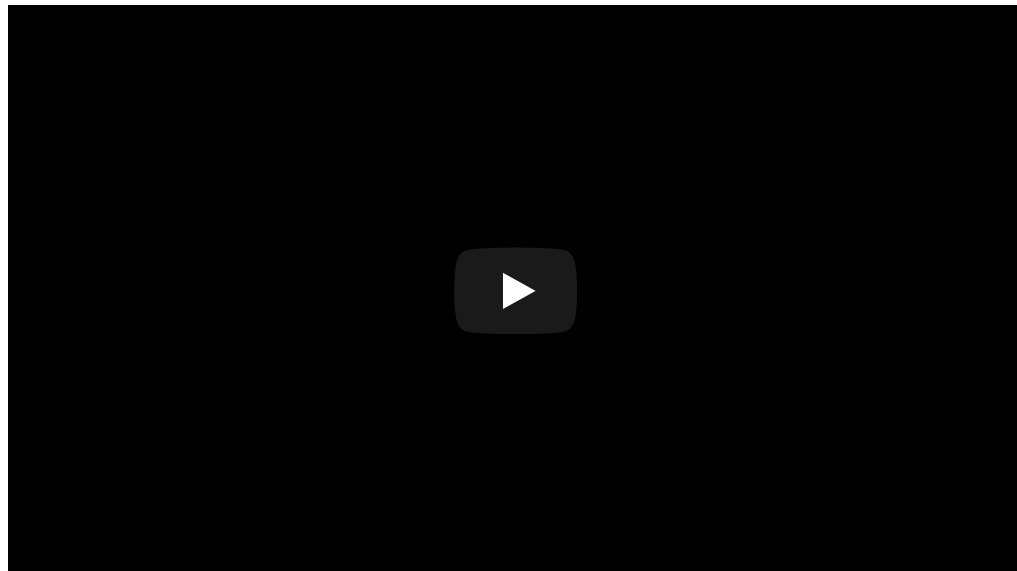

WISESCENE SWITCH

Voltage: 240V

Maximum Wattage: 800W

General

Construction	Plastic
IP Rating	IP20
Maximum Addresses	20
Maximum Scenes per Receiver	64
Maximum Switches per Receiver	16
Minimum Spacing Between Receivers	200mm
Radio Frequency	868.3 MHz
Range for Metal Switch	50m Max Line Of Sight
Range for Plastic Switch	100m Max Line Of Sight

Dimensions

Height	35mm
Length	165mm
Width	47mm

Electrical

Input Voltage	240V
Maximum Wattage	800W
Output Voltage	240V
