

Switching On/Off

Wise Box Kit Version 3 includes Keypad & Key Fob

4 Channel, 5 Amps / Circuit



The **Wise Box Version 3 Kit** is an updated version of the original Wise Box Kit. Version 3 features four PIR timer dials for each circuit, allowing up to 16 PIR's to be connected.

The Version 3 kit includes a 4 button keyfob and a 4 button wall switch.

The Wisebox unit will control your lights, water features, electric shutters and gates etc. Once programmed, place the indoor wireless switch in a suitable location and the installation is complete. Enjoy switching your circuits from anywhere in your garden or home with the remote control.

The WiseBox Kit has a receiver that has four 5 amp circuits with a maximum amperage of 20 amps. The WiseBox kit can achieve up to a 200 metre range with a clear line of sight. These circuits can be changed from switching to an open circuit. Each circuit on the WiseBox is fused individually with a 5 amp fuse to protect all the circuits.

Programming Options

Option 1

Single Button On and Off

Programming this way will create an on and off from a single button on a wireless switch / remote.

Option 2

Dual button On and Off

Programming this way will assign your On and Off to 2 separate buttons.

Option 3


PIR / Timelag function

Programming this way only sends an ON signal, which is then switched off by a pre-set countdown timer. If you program to a PIR, then the PIR will reset itself to the pre-set time every time the sensor is triggered. If programmed to a switch or remote, then the countdown will switch off when it reaches 0 seconds.

Wise Switches / Remotes

The keyfob and the wall switch included within the kit both have four buttons. Once you have programmed the button of your choice to link with a channel, that button will switch the channels circuit on / off. You can add additional switches and remotes to a WiseBox if you wish, up to a maximum of 16.

Wise Controls Introduction Video

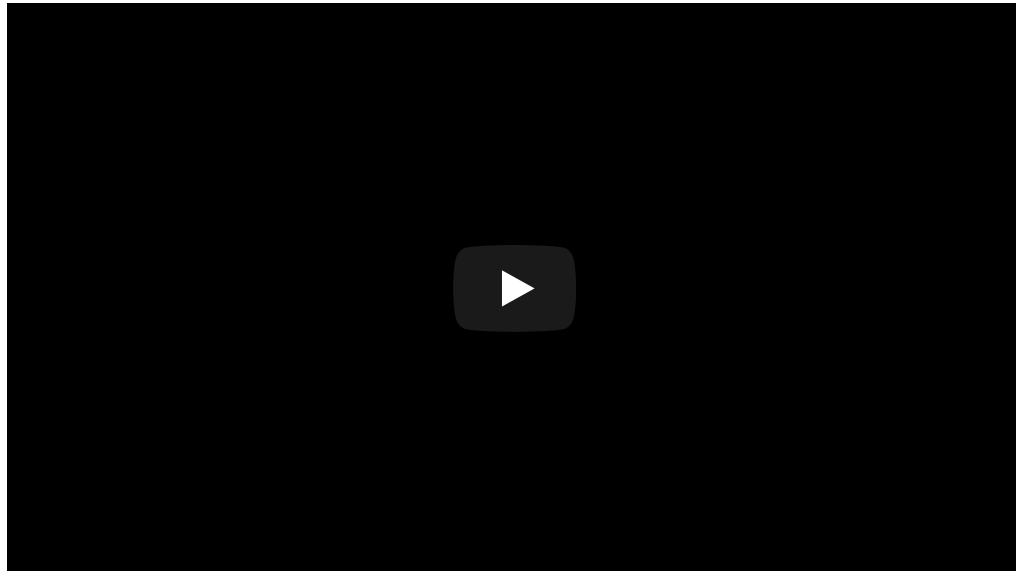

WISEBOX KIT V3

Type: 4 Channel, 5 Amps / Circuit

£150.00

Excl. VAT and Delivery

General

Detection Range 200m
IP Rating IP54

Dimensions

Depth 80mm
Height 150mm
Width 200mm

Electrical

Amperage 20A
Maximum Amps / Circuit 5A
Minimum Wattage per Circuit 1W
Voltage 240V